



1108

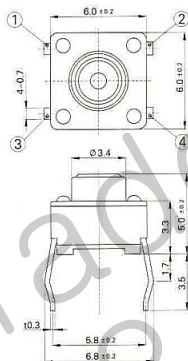


SPECIFICATION

1. RATING : DC 12V 50mA
2. CONTACT RESISTANCE : 100mΩ MAX.
3. TRAVEL : 0.25 ± 0.1mm
4. BOUNCE : 10m SEC MAX.

5.

MODEL	OPERATING FORCE	LIFE CYCLES
1108 -1	130 ± 30gf	50,000 CYCLE
1108 -2	180 ± 50gf	50,000 CYCLE
1108 -3	250 ± 50gf	30,000 CYCLE

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

