

RoHS COMPLIANT

规格说明: Specifications:

电气特性: Electrical:






1. 额定电流: Current Rating  
1.0A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗: Contact Resistance  
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:  
100MEGA ohms MIN

原材料: Raw material:

1. 塑胶: Plastic cement:  
High Temperature Thermoplastics,  
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C5191/C2680
3. 外壳: Shell: Copper Alloy C2680

电镀: ElectroPlate:

1. 端子: Contact: Plated Gold in Mating Area:  
Tin On Solder Tails
2. 外壳: Shell:  
Nickel Plating

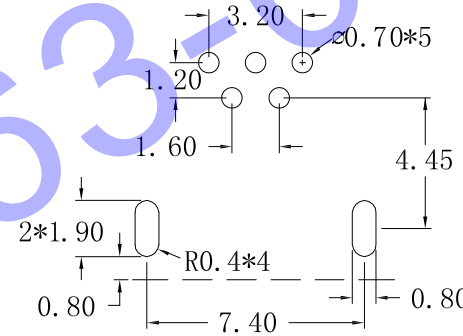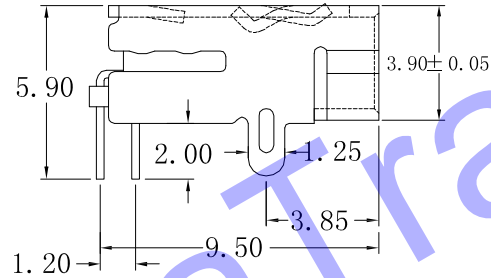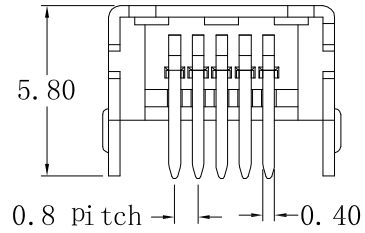

RECOMMENDED PCB LAYOUT

A		B		C		D		E		F		G		H	
REV	DESCRIPTION	DATE	QUALITY SYMBOLS	UNIT	SCALE	TOLERANCES	ITEM	DESC	Q'TY	MATERIAL		REMAKS		PART REMAKS	
			■: CRITICAL ▽: ZERO DEFECT ☒: MAJOR ▽: S.P.C	mm	3:1	DIM. ±0.30 ANGLE: 3°	APPROVED	CHECKED	DESIGN	DRAWN	PART NO.			SHT	1/1
A	图面发行	09'-10-23									DESCRIPTION	MINI USB 5P/F 90° B型两脚			
											DRAWING NO.			REV	A

H D C 有限公司

【客户用图】