

ROHS


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

注解:

规格描述:

1. 额定电流: 3A MAX
2. 额定电压: 20V DC MAX
3. 介质承受电压: 100 VAC 1MINUTE
4. 工作温度: -30 °C ~ 85 °C
5. 接触阻抗: 40 MILLIONHM MAX
6. 绝缘阻抗: 100 MEGOHMS MIN.
7. 插入力: 5N~20N
8. 拔出力: 8N~20N
9. 寿命耐久: 5000 次
10. 盐雾: 24H

NO.	NAME	DESCRIPTION
3	CONTACT	COPPER ALLOY
2	INSULATOR	HIGH TEMPERATURE PLASTIC UL 94 V-0
1	SHELL	COPPER ALLOY

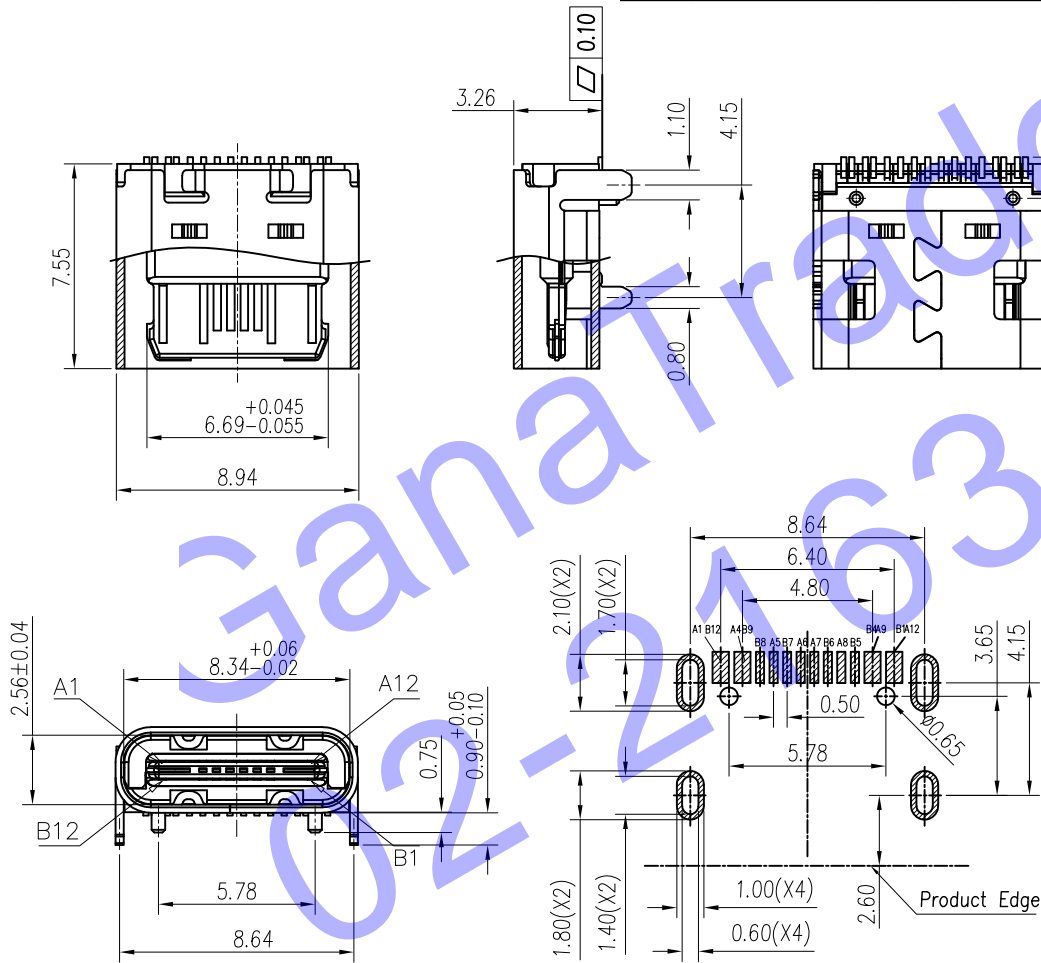

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

08/21-17	LIN		NEW-DWG		A0
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
-TOLERANCES- UNLESS OTHERWISE SPECIFIED			H D C 有限公司		
			TITLE: TYPE-C 16P 插针 SMT 料		
X.	±0.30	X.XXX ±0.100	APPD:	PRODUCT NO:	
X.X	±0.25	X.X* ±3.00*	CHECK:	DATE	SCALE UNIT TYPE PAGE
X.XX	±0.15	X.XX* ±1.00*	DRAW: LIN YUN	2017.08.21	1:1 mm CD 1/1