

REV.	MODIFICATION	ECN No.	NAME	DATE
A0	新版发行		LINYUN	2019-03-12

NOTES:

1.MATERIAL:  
MOLDING: LCP UL94 V-0  
CONTACT:COPPER ALLOY.  
GOLD PLATED Min ON CONTACT AREA,100u"  
Min TIN (LEAD FREE) ON SOLDER AREA,  
SHELL: SUS304-H,T=0.30±0.03mm  
50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:  
INSERTION: 5~20N.  
EXTRACTION: 8~20N AFTER TEST.  
DURABILITY: 10000 CYCLES

3.ELECTRICAL:  
CURRENT: 5A FOR VBUS;  
0.25A FOR OTHER.  
VOLTAGE: 20 V MAX  
WITHSTANDING VOLTAGE: 100V AC R.M.S.  
CONTACT RESISTANCE: 40mΩ MAX.  
INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL  
TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:  
图示有标⊗者为首样全检,重点管控尺寸.

6. 产品符合RoHS标准

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

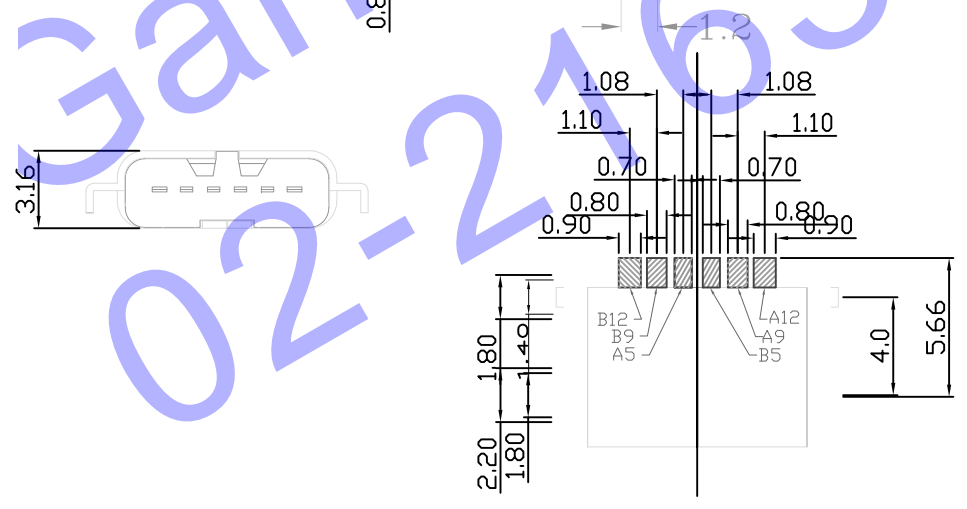


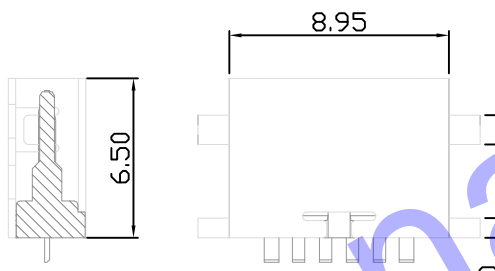

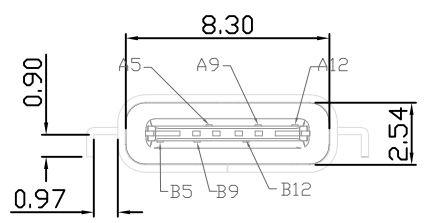


Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	端子	TX	SUS 304 R-H NO PLATING
	端子	TX	SUS 301 R-H Sn 80~200u"
	外壳	TX	SUS 301 R-H 电镀切料带后.

# H D C 有限公司

.X: ±0.35	.X*: ±1.5°	INTENDED USE:	TITLE:
.XX: ±0.25	.XX*: ±1.0°	CONNECTOR	USB TYPE-C 6P沉板1.2
.XXX:±0.20	.XXX*:±0.5°	APPD.:	PART NO.: SEE TABLE
MAT'L.:	SEE NOTES	CHKD.:	DWG. NO.: CQ-UCCB612
FINISH:		DR.: LIN YUN	SCALE: 1:1 PAGE: 1/1
			UNIT: mm REV.: A0