



NOTE:

1.MATERIAL:

- a.HOUSING:PBT GLASS FIBRE PBT
- b.CONTACT:PHOSPHOR BRONZE T=0.25mm
(SURFACE PLATING: Au1u"+Sn100u"+Ni60u")
- c.SHEEL:BRASS T=0.30mm
(SURFACE PLATING:Ni100u"~120u")

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -55??- 105??

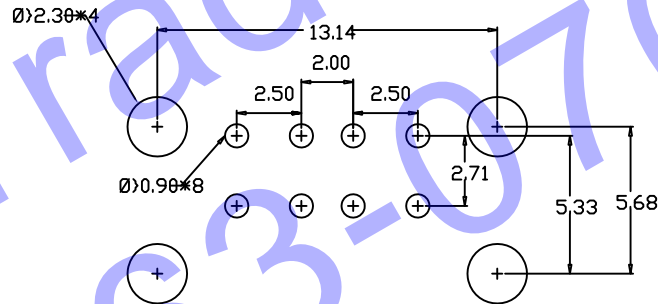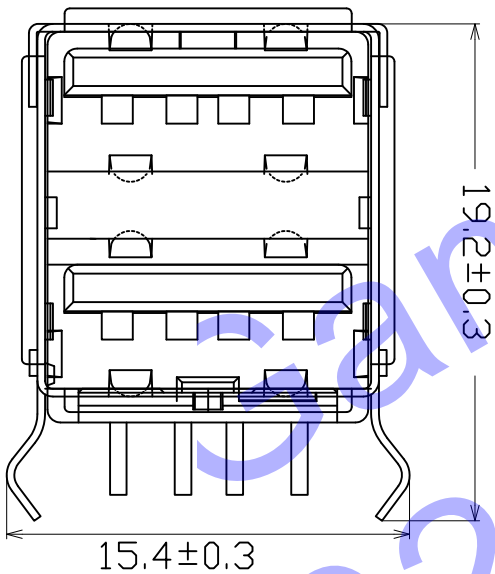

RBCOMMENDBD P.C.B PATTBRN LAY OUT

H D C 有限公司


UNLESS OTHERWISE SPECIFIED TOLERANCE

.X	±0.20
.XX	±0.15
.XXX	±0.10
ANG.	±2°

DRAWN
H.Q.huocy

APPROVED

DATE
2011.03.18



UNIT
MM

SCALE
3/1

SIZE
A4

TITLE USB AF 双层半包有后盖平弹

PART NO.

DOC. NO.

REV.
A