

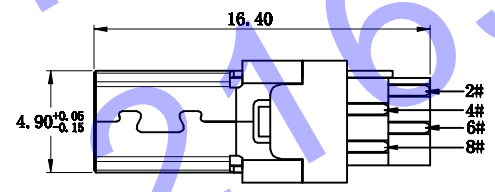
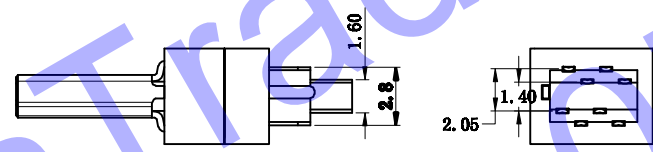




AUTOCAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN NO.	DESCRIPTION	DRAW	DATE
A0	N/A	新发行	zhang	2018-10-15

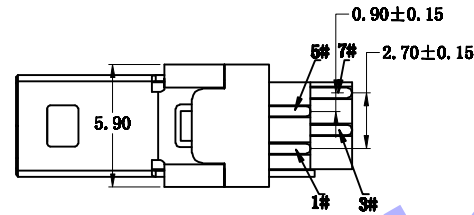

- 规格说明: Specifications:**
电气特性: Electrical:
1. 额定电流: Current Rating
1.0A/contact terminal
 2. 额定电压: Voltage Rating
30V DC
 3. 接触阻抗: Contact Resistance
50 milliohms MAX
 4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
 5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

- 原材料: Raw material:**
1. 塑胶: Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
 2. 端子: Contact: Copper Alloy C5191
 3. 外壳: Shell: Copper Alloy C2680
- 电镀: Electroplate:**
1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
 2. 外壳: Shell:
Nickel Plating

TABLE:

PRODUCT NO.	Material
MNE131U0200P-W	铜壳 胶芯LCP黑色 端子镀金G/F 盐雾24H
MNE131U0200P-WW	铜壳 胶芯LCP黑色 端子镀金G/F 盐雾48H

UNITS mm	SCALE 1:1	REV. A0	SHEET 1 OF 1	H D C 有限公司	
		DATE 2018-10-15	TITLE MINI USB 8PM 焊线(新款)		
GENERAL TOLERANCE		DR. zhang	MAT'L SEE TABLE		FINISH SEE TABLE
0. ±0.35 0.0 ±0.35 0.00 ±0.25 0.* ±4* 0.0* ±2*		CHK.	DWG.NO.	A	PART NO. SEE TABLE
		APPD.			SIZE A4