

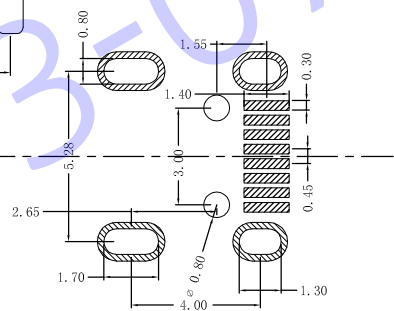






| REV. | ECN NO. | DESCRIPTION | DRAW | CHECK | APPD. | DATE |
|------|---------|-------------|----------|--------|-------|------|
| X0 | | 新发行 | Zhanping | JACKLY | | |



规格说明:Specifications:
 电气特性:Electrical:
 1. 额定电流: Current Rating
 1.0A/contact terminal
 2. 额定电压: Voltage Rating
 30V DC
 3. 接触阻抗: Contact Resistance
 50 milliohms MAX
 4. 耐电压: Dielectric Withstanding Voltage:
 300 V AC AT Sea Level
 5. 绝缘阻抗: Insulation Resistance:
 100MEGA ohms MIN

物理性能: Mechanical:
 1. 插拔力: Connector Mate and Unmate Force
 Mate force: 3.0kgf (MAX)
 Unmate force: 0.7kgf (MIN)
 2. 端子保持力: Terminal Retention
 0.5kgf (MIN)

原材料: Material:
 1. 塑胶: Housing:
 High Temperature Thermoplastics,
 UL 94V-0 LCP Black
 2. 端子: Contact: Copper Alloy C5191
 3. 外壳: Shell: Copper Alloy C2680

电镀: Finish:
 1. 端子: Contact: Plated Gold in Mating Area;
 Tin On Solder Tails
 2. 外壳: Shell:
 Nickel Plating

| UNITS | SCALE | REV. | SHEET | TITLE: | | |
|-------------------|-------|-------|----------|---------------------------------------|----------|-----------|
| mm | 1:1 | X0 | 1 OF 1 | MINI USB 8P/F 90° DIP四脚 (MOLDING单边倒角) | | |
| | | DATE | 11.03.15 | | | |
| GENERAL TOLERANCE | | DR. | Zhanping | | | |
| 0. | ±0.35 | CHK. | JACKLY | | MAT'L | SEE TABLE |
| 0.0 | ±0.25 | APPD. | | | FINISH | SEE TABLE |
| 0.00 | ±0.15 | | DWG. NO. | | PART NO. | SIZE |
| 0.° | ±5° | | | | A | A4 |
| 0.0° | ±3° | | | | | |