
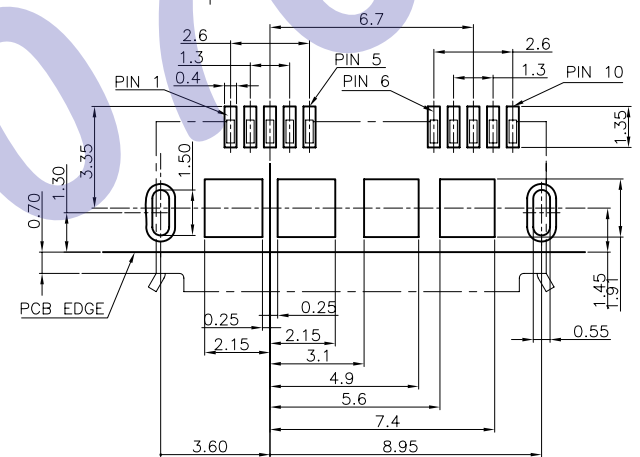


NOTE:

- 1.MATERIAL:
 - 1.1 INSULATOR:LCP UL 94V-0
 - 1.2 CONTACT:COPPER ALLOY(T=0.15mm)
 - 1.3 SHELL:SUS-304(T=0.30mm)
- 2.ELECTRICAL CHARACTERISTICS:
 - 2.1 CONTACT RATING:30 VAC
 - 2.2 CONTACT CURRENT RATING:1.5A
 - 2.3 CONTACT RESISTANCE:30mΩ MAX INITIAL
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
 - 2.5 INSULATION RESISTANCE 100MΩ MIN INITIAL
 - 2.6 OPERATING TEMPERATURE:-0°C ~ 50°C
- 3.MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE:3.57kg MAX
 - 3.2 UNMATED FORCE:1.02kg MIN
 - 3.3 DURABILITY:1500 CYCLES
- 4.PLATING:
 - 4.1 TERMINAL UNDER PLATING:50μ" MIN NICKEL, 80μ"MIN Tin ON SOLDER AREA, SELECTIVE GOLD ON CONTACT AREA.
 - 4.2 SHELL:100μ"MIN.NICKEL OVER 20μ" MIN COPPER

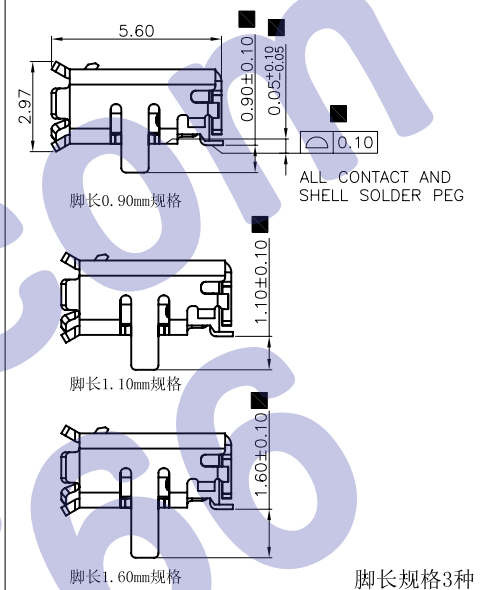

RECOMMENDED P.C.B LAYOUT

重点尺寸

HDC 有限公司

3	SHELL	1	SUS304	SEE NOTE
2	TERMINAL	10	C2680-H	SEE NOTE
1	Molding-ASSY	1	LCP	UL94V-0; COLOR:BLACK
NO.	TITLE	Q'TY	MATERIAL	REMARK

General Tolerance	
.X	±0.30
.XX	±0.20
.XXX	±0.10
Angle Tolerance	
.X°	±2.0°
.XX'	±1.0'
.XXX"	±0.5"

DRAW	YANG	11'/03/25
DESIGN	YANG	11'/03/25
CHECK		
APPRO.		

名称	USB 3.0 MICRO B TYPE REC (DIP)		
TITLE:			
料号 PART NO.	MU076		
图号 DWG. NO.			
SCALE	1:1	UNIT:mm	A4
			SHEET: 1 of 1

ECN(DCN) NO.	REV	A	DESCRIPTION	CHANGE	APPRO.
--------------	-----	---	-------------	--------	--------