
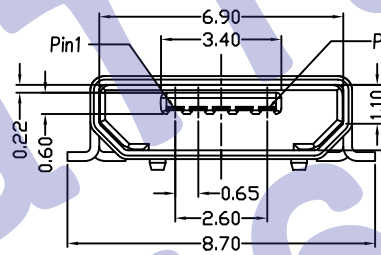


Note:

- Material:
  - Housing: High temperature thermoplastic with g.f, UL94v-0
  - Contact: copper alloy, t=0.20mm
  - Shell: copper alloy, t=0.25mm
- Specification:
  - Current rating: 1 A Max.
  - Dielectric withstanding voltage: 100 V(ac) for 1 min.
  - Contact resistance: 50 mΩ Max.
  - Insulation resistance: 100 MΩ Min.
  - Total mating force: 3.57 Kgf Max.
  - Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
  - Temperature range: -30°C~80°C

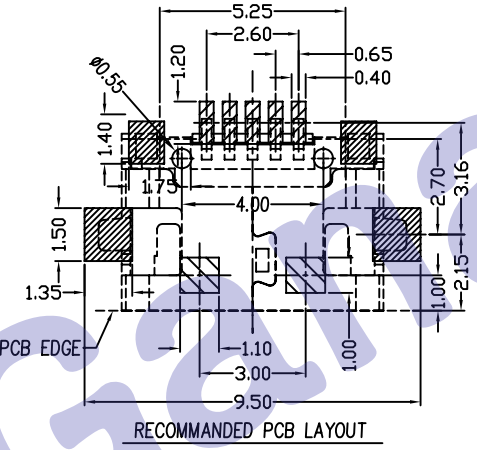

MU095

颜色 (主体)	材质 (主体)	外壳镀层	端子镀层 (接合处)
1: 黑色	1: PBT	1: 全金	1: 1U"
2: 白色	2: LCP	2: 全镍	2: 3U"
3: 贝吉色	3: NL9T	3: 全锡	3: 5U"
4: 灰色	4: NL6T	4: 前金后锡	4: 10U"
5: 蓝色	5: ABS	5: 前金后镍	5: 15U"
6: 绿色	6: NL66	6: 前镍后锡	6: 30U"
7: 红色	7: PPS	0: 其它	0: 其它
8: 其它	8: PVC		
	9: PE		
	0: 其它		

设计 DRAW BY	杨帆	审核 DISCUSS BY		HDC有限公司	图名 DRAWING NO	MICRO USB B TYPE SMT 全贴 直边 有注	图号 SHEET NO	095	日期 DATE	2011.4.15
校对 DISCUSS BY		比例 SCALE	2:1		客户 VERSION		数量 QUAN	备注 REMARK	版次 REMARK	张号 SHEET