


Electrical
 Voltage: 5.0 V
 Current: 0.5 A
 Contact Resistance: Terminal 50 milliohms max-shell and Terminal
 Isulation Resistance: 100 Megohms min
 Dielectric Withstanding Voltage: 100 V AC/1 min
 Temperature: -40℃~85℃

UA050-

- | | | | |
|---------|---------|---------|------------|
| 颜色 (主体) | 材质 (主体) | 外壳镀层 | 端子镀层 (接合处) |
| 1: 黑色 | 1: PBT | 1: 全金 | 1: 1U" |
| 2: 白色 | 2: LCP | 2: 全裸 | 2: 3U" |
| 3: 贝吉色 | 3: NL9T | 3: 全锡 | 3: 5U" |
| 4: 灰色 | 4: NL6T | 4: 前金后锡 | 4: 10U" |
| 5: 蓝色 | 5: ABS | 5: 前金后裸 | 5: 15U" |
| 6: 绿色 | 6: NL66 | 6: 前镍后锡 | 6: 30U" |
| 7: 红色 | 7: PPS | 0: 其它 | 0: 其它 |
| 0: 其它 | 8: PVC | | |
| | 9: PE | | |
| | 0: 其它 | | |

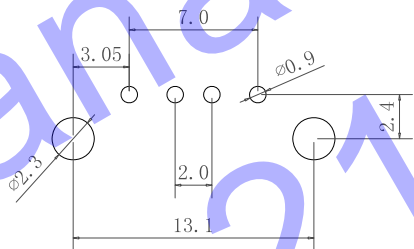

PCB LAYOUT

TOLERANCE			
SELECT	TOL		
DIN	1	2	3
0.000+/-	0.02	0.05	0.10
0.00 +/-	0.05	0.10	0.15
0.0 +/-	0.10	0.15	0.20
0 +/-	0.15	0.20	1.00
ANGLE+/-	1.0	1.0	1.5

No.	PART NAME	DESCRIPTION	THICKNESS	QTY
1	HOUSING	PBT		1
2	BACK LOCK	PBT		1
3	SHELL	BRASS/SPCC	0.30mm	1
4	CONTACT	BRASS	0.2mm	4

设计
DRAW BY 杨帆

审核
DISCUSS BY

比例
SCALE 2:1

H D C 有 限 公 司

图名
DRAWING NO

客户
VERSION

USB AF180度 DIP 15.3

图号
SHEET NO

备注
REMARK

日期
DATE

版次
REMARK

2007.10.16

张号 1/1