

5

4










3

2

1

MU015- □ □ □ □

颜色 (主体)	材质 (主体)	外壳镀层	端子镀层 (接合处)
1: 黑色	1: PBT	1: 全金	1: 1U"
2: 白色	2: LCP	6: 前镍后锡	6: 30U"
3: 贝吉色	3: NL9T	2: 全镍	2: 3U"
4: 灰色	4: NL6T	0: 其它	3: 5U"
5: 蓝色	5: ABS	3: 全锡	4: 10U"
	6: NL66	4: 前金后锡	5: 15U"
	7: PPS	5: 前金后镍	
	8: PVC		
	9: PE		
	0: 其它		

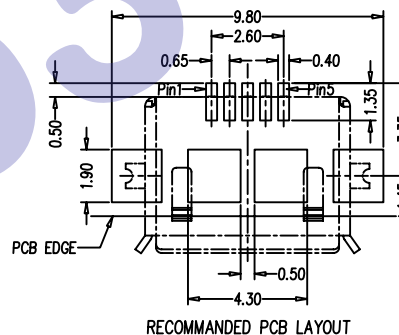

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f. UL94v-0
 - Contact: copper alloy, t=0.20mm
 - Shell: copper alloy, t=0.25mm
 - Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 50 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
 - Temperature range: -30°C~80°C

A

A

设计 DRAW BY	杨帆	审核 DISCUSS BY	
校对 DISCUSS BY		比例 SCALE	2:1

HDC 有限公司

图名 DRAWING NO	MICRO USB AB TYPE 无胶柱	图号 SHEET NO	015	日期 DATE	2008.09.12
客户 VERSION		备注 REMARK		版次 REMARK	
数量 QUAN		张号 SHEET	1/1		

6

5

4

3

2

1