


# MU108升级版主体

颜色 (主体)		材质 (主体)		外壳镀层		端子镀层 (接合处)	
1: 黑色	6: 绿色	1: PBT	2: LCP	1: 全金	6: 前镍后锡	1: 1U"	6: 30U"
2: 白色	7: 红色	3: NL9T	4: NL6T	2: 全镍	0: 其它	2: 3U"	0: 其它
3: 贝吉色	0: 其它	5: ABS	6: NL66	3: 全锡		3: 5U"	
4: 灰色		7: PPS	8: PVC	4: 前金后锡		4: 10U"	
5: 蓝色		9: PE	0: 其它	5: 前金后镍		5: 15U"	

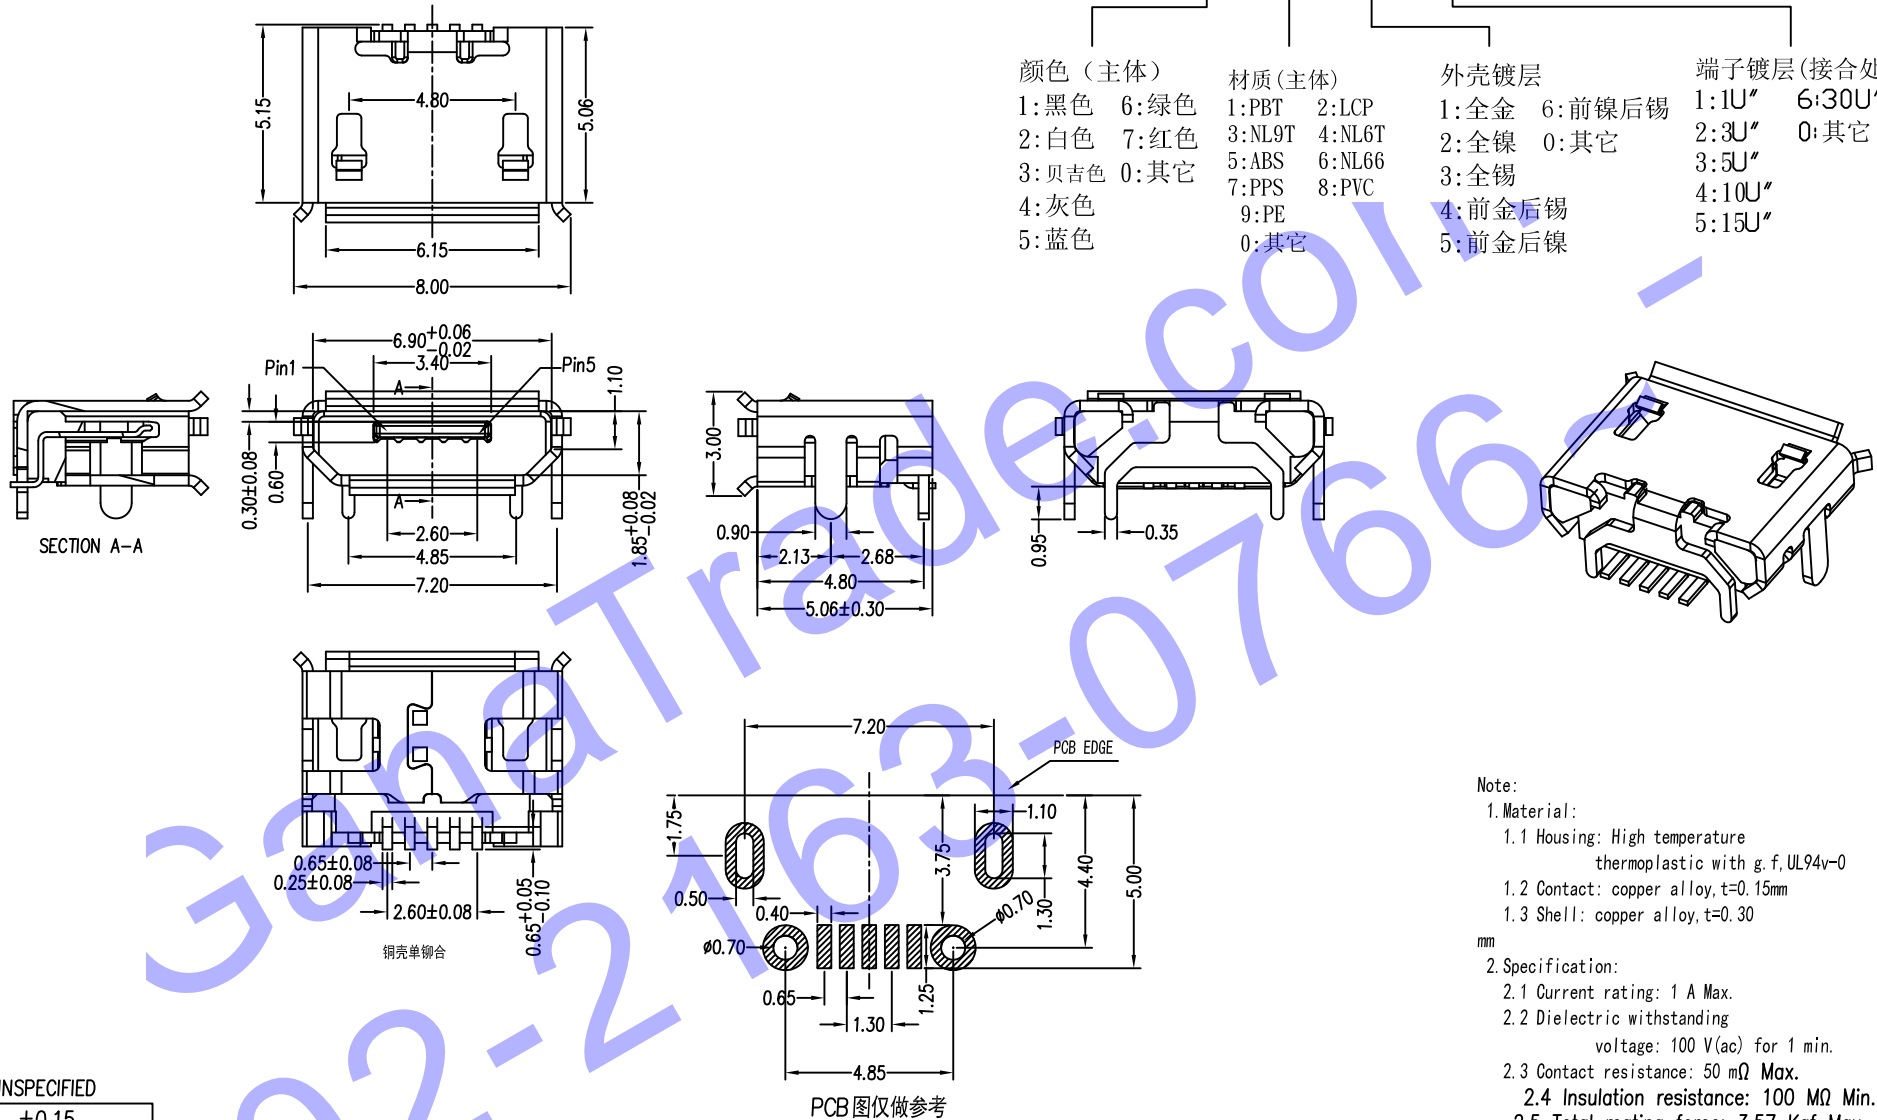

Note:

- Material:
  - Housing: High temperature thermoplastic with g. f. UL94v-0
  - Contact: copper alloy, t=0.15mm
  - Shell: copper alloy, t=0.30mm
- Specification:
  - Current rating: 1 A Max.
  - Dielectric withstanding voltage: 100 V(ac) for 1 min.
  - Contact resistance: 50 mΩ Max.
  - Insulation resistance: 100 MΩ Min.
  - Total mating force: 3.57 Kgf Max.
  - Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 5000 insertion/extraction cycles
  - Temperature range: -30°C~80°C

TOLERANCE UNSPECIFIED

.x	±0.15
.xx	±0.10
.xxx	±0.05
Ang.	±1°

设计 DRAW BY	杨帆	审核 DISCUSS BY	
校对 DISCUSS BY		比例 SCALE	2:1

## H D C 有 限 公 司

图名 DRAWING NO	MICRO USB B TYPE 四脚DIP (后盖DIP)		图号 SHEET NO	MU108升级版主体		日期 DATE	2019.11.05	
料号 VERSION		数量 QUAN	备注 REMARK		版次 REMARK	张号 SHEET	1/1	