
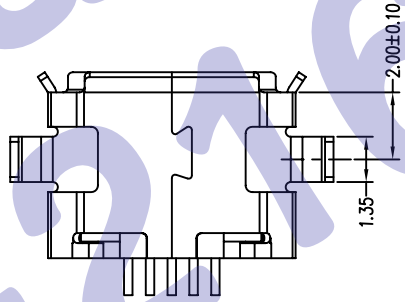
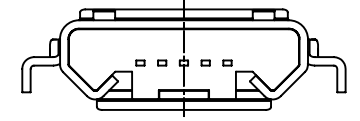
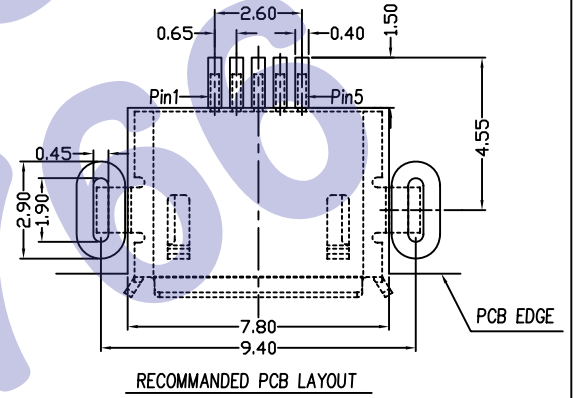

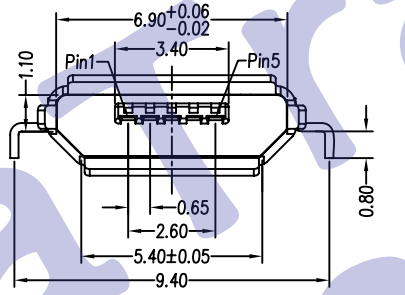



5 4 3 2 1

MU122- □ □ □ □

- | | | | |
|---------|---------|---------|------------|
| 颜色 (主体) | 材质 (主体) | 外壳镀层 | 端子镀层 (接合处) |
| 1: 黑色 | 1: PBT | 1: 全金 | 1: 1U" |
| 2: 白色 | 2: LCP | 6: 前镍后锡 | 6: 30U" |
| 3: 贝吉色 | 3: NL9T | 2: 全镍 | 2: 3U" |
| 4: 灰色 | 4: NL6T | 0: 其它 | 3: 5U" |
| 5: 蓝色 | 5: ABS | 3: 全锡 | 4: 10U" |
| | 6: NL66 | 4: 前金后锡 | 5: 15U" |
| | 7: PPS | 5: 前金后镍 | |
| | 8: PVC | | |
| | 9: PE | | |
| | 0: 其它 | | |

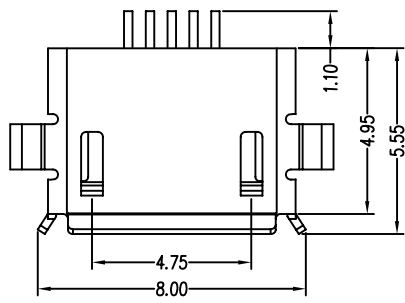

- Notes:
- Materials:
 - Housing: High temperature thermoplastic with g.f, UL94 v-0.
 - Contact: copper alloy, t=0.20mm.
 - Shell: copper alloy, t=0.25mm.
 - Specifications:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 50 mW Max.
 - Insulation resistance: 100 MW Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
 - Temperature range: -30°C~+80°C

A

A

设计 DRAW BY	杨帆	审核 DISCUSS BY	
校对 DISCUSS BY		比例 SCALE	2:1

HDC 有限公司

图名 DRAWING NO	MICRO USB 5PF B TYPE SMT沉板1.0两只脚DIP	图号 SHEET NO	MU122	日期 DATE	2012.04.12
料号 VERSION		数量 QUAN		备注 REMARK	
			版次 REMARK		张号 SHEET
					1/1

6 5 4 3 2 1