
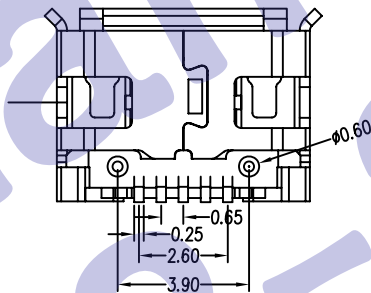




RECOMMEND PCB LAYOUT

MU124-

颜色 (主体)	材质 (主体)	外壳镀层	端子镀层 (接合处)
1: 黑色	1: PBT	1: 全金	1: 1U" 6: 30U"
2: 白色	2: LCP	2: 全镍	2: 3U" 0: 其它
3: 贝吉色	3: NL9T	3: 全锡	3: 5U"
4: 灰色	4: NL6T	4: 前金后锡	4: 10U"
5: 蓝色	5: ABS	5: 前金后镍	5: 15U"
6: 绿色	6: NL6T		
7: 红色	6: NL66		
0: 其它	7: PPS		
	8: PVC		
	9: PE		
	0: 其它		

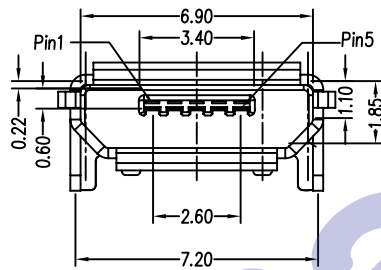

Notes:

- Materials:
 - Housing: High temperature thermoplastic with g.f,UL94 v-0.
 - Contact: copper alloy,t=0.20mm.
 - Shell: copper alloy,t=0.25mm.
- Specifications:
 - Current rating: 1 A Max.
 - Dielectric withstanding:voltage: 100 V(ac) for 1 min.
 - Contact resistance: 50 mW Max.
 - Insulation resistance: 100 MW Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
 - Temperature range: -30°C~+80°C

设计 DRAW BY	杨帆	审核 DISCUSS BY	
校对 DISCUSS BY		比例 SCALE	2:1

HDC有限公司

图名 DRAWING NO	MICRO USB 5PF B TYPE 四只脚DIP6.6间距		图号 SHEET NO	MU124	日期 DATE	2012.04.12
料号 VERSION		数量 QUAN	备注 REMARK	版次 REMARK	张号 SHEET	1/1