

目录 MAPX	设变内容 MODIFICATION	日期 DATE

特性: Specifications:

电气: Electrical:

1. 接触阻抗: Contact Resistance:
30 milliohms MAX
2. 耐电压: Dielectric With Standing Voltage:
500 V AC AT Sea Level
3. 绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MIN

机构: Mechanical:


1. 结合力: Mating Force:
35 N MAX 最大 35 N
2. 拔出力: Unmating Force:
8 N MIN 最少 8 N

材料: Material:

1. 塑胶: PBT.
2. 端子: Contact: C2680
3. 外壳: Shell: C2680

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area:
Tin/Lead On Solder Talls. 接触点镀金, 脚镀锡
2. 外壳: Shell:
Nickel Plating . 镀镍

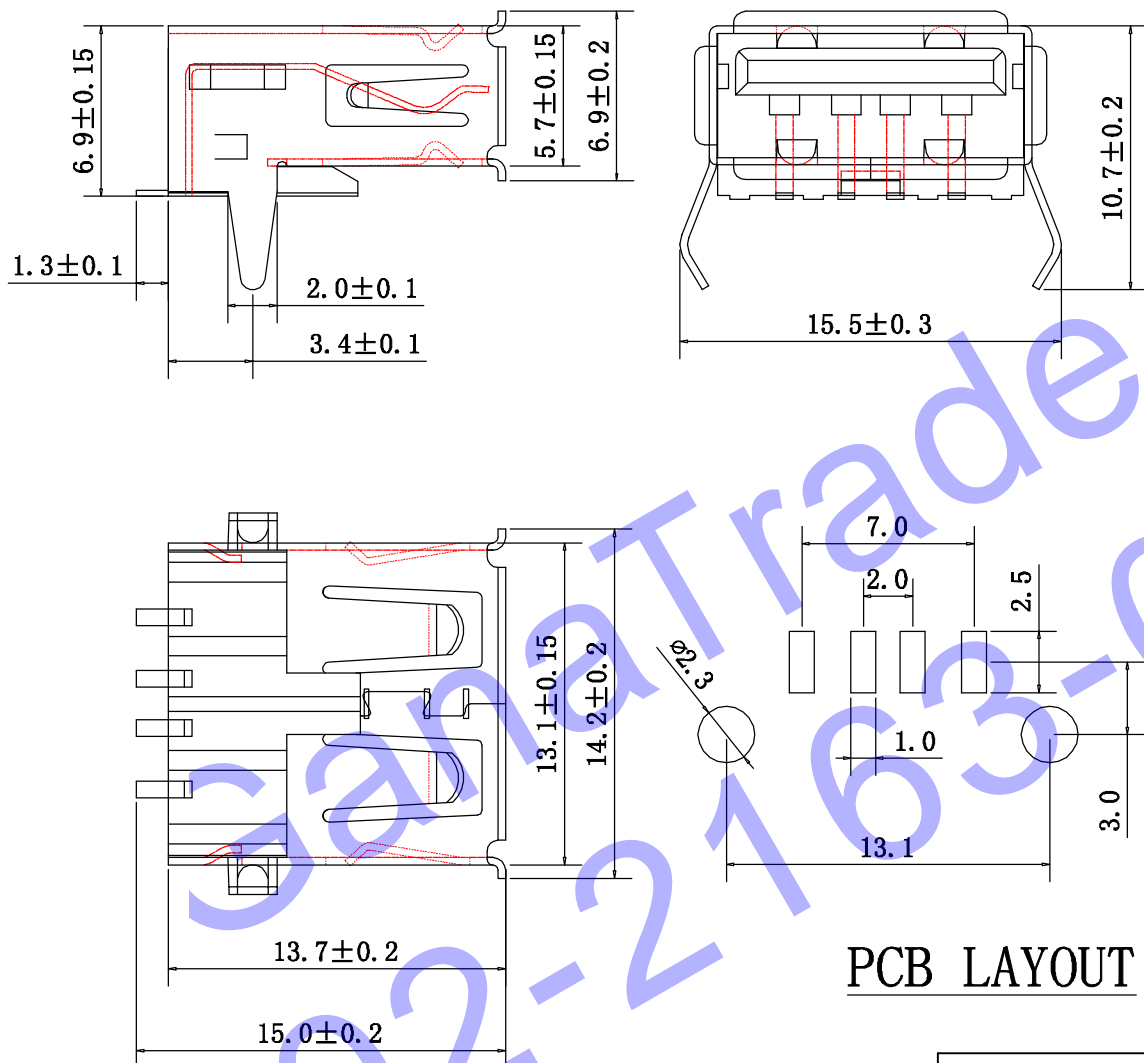

PCB LAYOUT

产品图 PRODUCT CHART DWG				H D C 有限公司			
公差表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	客户料号 PRODUCT PART NO.
X.	±0.30	X'	±6'	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.
.X	±0.25	.X'	±3'	日期 DATE	2014/04/23	核准 APPD	角法 VIEW
.XX	±0.20	.XX'	±2'	未标注的公差按一般标准计算		版本 VER	A0