
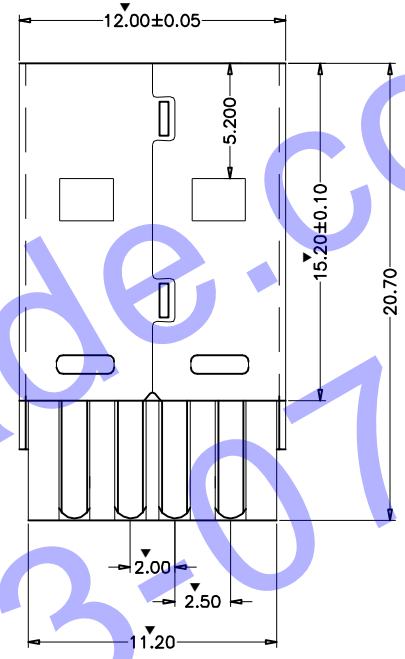



RoHS

REV.	MODIFICATION	APP.	DATE
A	NEW	MAY	2014.05.31

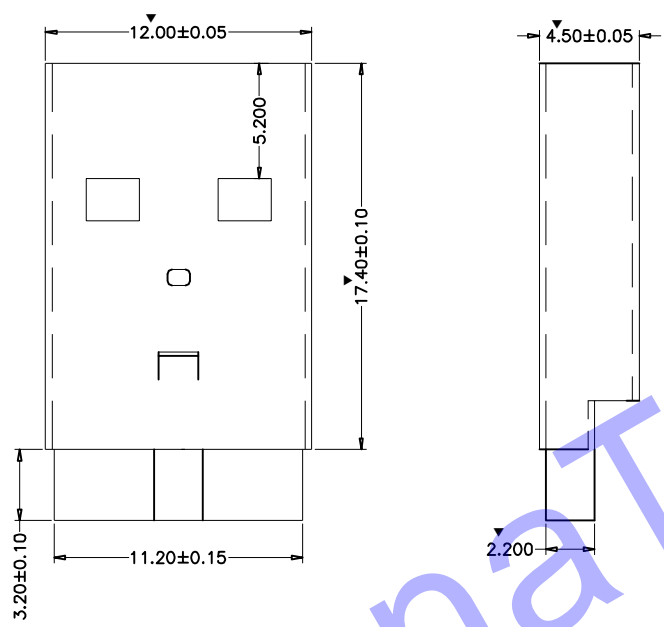

NOTE:
 1.MATERIAL:
 a.HOUSING:THERMOPLASTIC GLASS FIBRE UL94V-0
 b.CONTACT:BRASS T=0.20mm
 (SURFACE PLATING: Au* μ " + Sn100 μ " + Ni50 μ " Min)
 SEE ORDERING INFORMATION
 c.CRUST: T=0.30mm
 (SURFACE PLATING: Ni80 μ " ~ 100 μ ")
 SEE ORDERING INFORMATION
 2.ELECTRIC:
 a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
 b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
 d.OPERATING TEMPERATURE: -55° C ~ +85° C

- PART NO: Y01 A M2 04 1 J P 1 S 3 E
 1 2 3 4 5 6 7 8 9 10 11
- 产品系列区分: Y01=USB 2.0
 - 型式区别: A=A型
 - 规格区分: M1=线端
 - PIN数区分: 04=4PIN
 - 材质区分: 1=PBT
 - 特殊作法: W=短体焊线式
 - 外壳材质: P=SPCC
 - 胶芯颜色区分: 1=白色
 - 接触端电镀: S=半金1 μ "
 - 包装方式: 3=Tray
 - 环保选项: E=RoHS(Bright)



HDC 有限公司				Title: USB AM 短体焊线式	
<i>Tolerances</i>		App.	Tcd	Units <input checked="" type="checkbox"/> mm <input type="checkbox"/> inch	Part no: Y01AM1041WP1S3E
Linear	Angles				
.x ±0.30	x° ±5°	Dr.	May	Size A4	Dwg no.
.xx ±0.20	x° ±2°	Date.	2014.05.31	Scale 1:1	Sheet 1/1
.xxx ±0.10	.xx° ±1°				
Projection	Revision.				
	A				