

NOTE:

1. Material:

Housing: Thermoplastics,UL94V-0,PBT,BLACK
 Contact: Copper Alloy
 Shell: Ferro Alloy

2. FINISH:

Contact: Gold Flash Plated on Contact Area,
 80u" Min.Tin Plated on Solder Tails,
 50u" Min.Nickel Underplating Over All.
 Shell: 50u" Min.Nickel Underplating Over All.

3. Specification:

3.1: Voltage Current Rating: 1.5 Amp. 30V/AC





3.2: Electrical:

Insulation Resistance(EIA-364-21):
 1000MΩ Min. at 500V/DC for 1Minute.

Contact Resistance(EIA-364-23):
 30 mΩ Max. at 20mV Max, 50mA



Dielectric Withstanding Voltage(EIA-364-20):
 No discharge, flashover or breakdown at 500V/AC
 1Minute

4. Ordering information

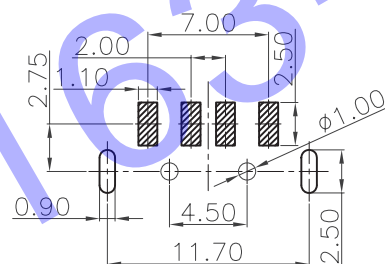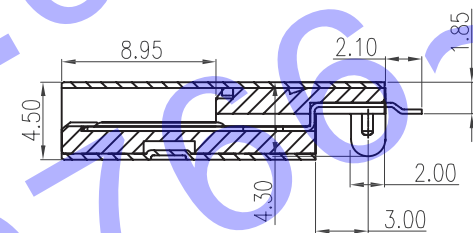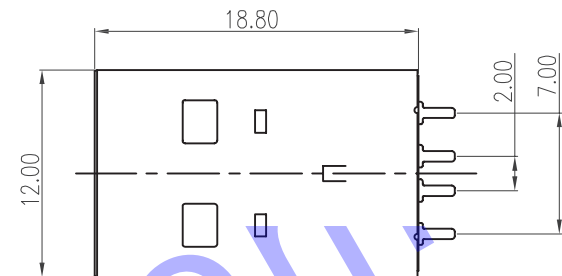

PC BOARD LAYOUT

沉孔

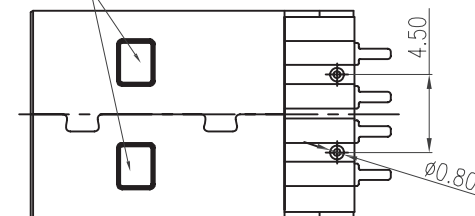

RoHS Compliant

單位 UNIT	MM	☒ Inspection Item	HDC 有限公司	
比例 SCALE	1:1	■ Cp/Cpk and SPC Control Item	圖號 DWG NO.	USB AM SMT
張數 SHEET	1/1	TOLERANCE UNLESS OTHERWISE SPECIFIED	名稱 TITLE	USB AM 沉板鐵黑成品(外壳沉孔)
製圖 DRAWIN	Zwj	.X±0.30 .X'±3'	角法 PROJ.	⊕
版本 REV.		.XX±0.25 .X'±1'		UA183
		.XXX±0.15 .XX±		
NEW ISSUE	09.12.21			
設變內容 MODIFICATION	日期 DATE	修改 DRAW	核准 APPROVE	審核 CHECKED