

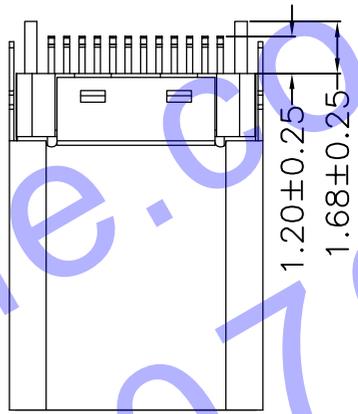
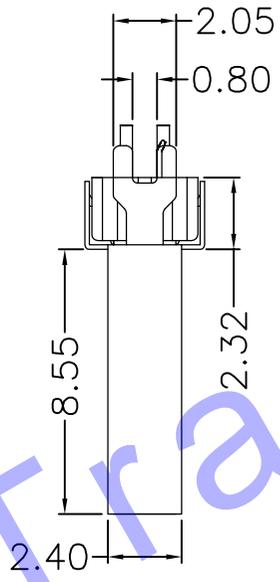
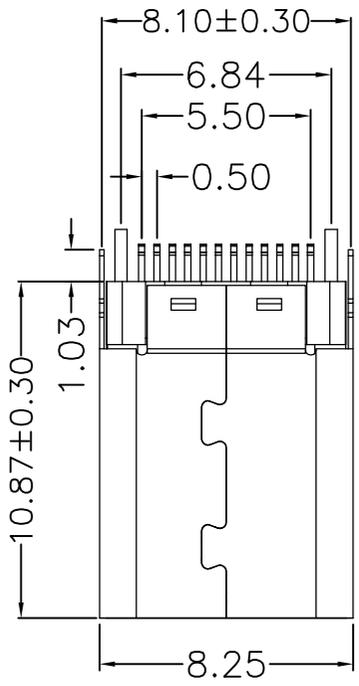
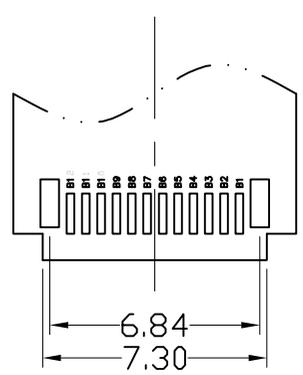


REV	LTR	DESCRIPTION	DATE	APPROVED
A0		依新料号编码原则发行图面	20230506	Ldd

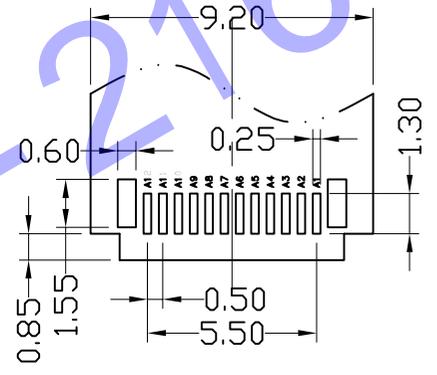

备注:
 1.材质:
 1.1胶芯: LCP+30%G.F UL94V-0
 1.2端子: C7025, T=0.15mm; 镍底, 镀金
 1.3外壳: 不锈钢, T=0.17mm; 表面镀镍
 1.4卡钩: 不锈钢, T=0.40mm; 表面镀锡
 1.5弹片: 不锈钢, T=0.10mm
 2.主要特性:
 2.1额定电流: 3A FOR VBUS;
 1.25A FOR GND;
 0.25A FOR OTHER.
 2.2接触阻抗: 40mΩ MAX
 2.3绝缘阻抗: 100MΩ MIN
 2.4耐压测试: 100V AC
 2.5沾锡性: 温度245±5℃, 时间5±0.5s
 2.6整体插入力: 5~20N
 整体拔出力: 8~20N
 耐久后拔出力: 6~20N
 2.7使用寿命: 10000次
 2.8工作温度: -25℃~+80℃

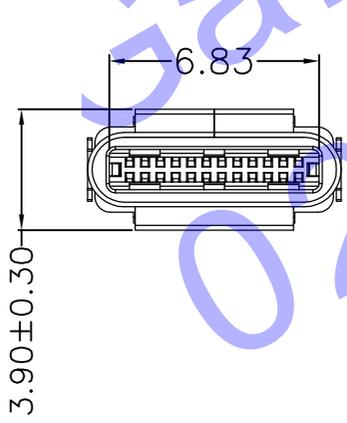

RECOMMENDED P.C.B LAYOUT(Both sides are sample)
 Tolerance:±0.05, Thickness=0.80mm

TOLERANCES		H D C 有限公司		
.X	±0.30			
.XX	±0.20	TITLE: USB TYPE-C/M 铆合款3.9夹板鱼叉脚 B款		
.XXX	±0.10	DRAWING NO. :		
ANGLES	±2.00°	GUSB-Y2138 NEW		
APPD. :		C. PART NO. :		
CHECK:				
DRAWN:	REV. : A/0	SIZE: A4	UNIT: MM	SCALE: 1 : 1
				SHEET: 1 / 1