

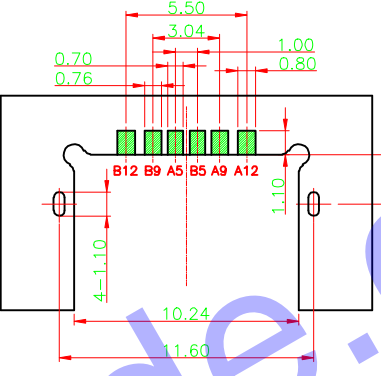
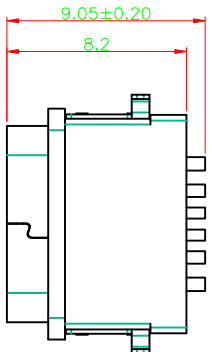



REV.	ECN. NO.	APPD.





RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm


- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. LNSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES
 9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.



0.10

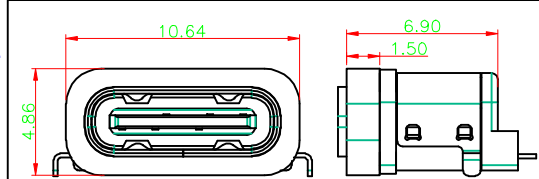

加防水圈示意图

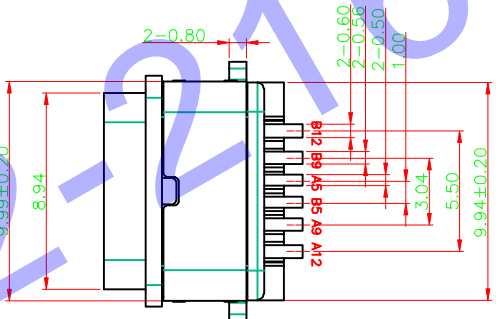

备注:

NO.	料号	备注
1	AAOB010-077	不带硅胶
2	AAOB010-079	带硅胶

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	SHELL	STAINLESS STEEL	Ni Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	Ni Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/Ni Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

X.	± 0.50	X.*	± 2°	UNITS mm
.X	± 0.30	.X*	± 1°	
.XX	± 0.10	.XX*	± 0.5°	MAT'L —
.XXX	± 0.05			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN CHUANGYUE TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN CHUANGYUE TECHNOLOGY CO., LTD				FINISH —
Q'TY —				

H D C 有限公司

TITLE:
TYPE C 单排防水母 两脚DIP

APPD:
CHKD:
DR: 2018-10-20

DWG NO:
UC-034-1

SCALE	SHEET	REV.
1/1	1/1	A1