

HSF


Specification

- 1.Current Rating:1.5AMP at 250V AC
Voitage rotng:30v
- 2.Contact Resistance:30mΩ max
- 3.Insulation Resistance:1000MΩ min
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Rating:-20℃ to +60℃
- 6.Mechanical Characteristics:
insertion Force:35 Newtons maximum
Extraction Force:10 newtons minimum

Contact Material:Brass

Insulator Material:PBT+(UL94V-0 Black)

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

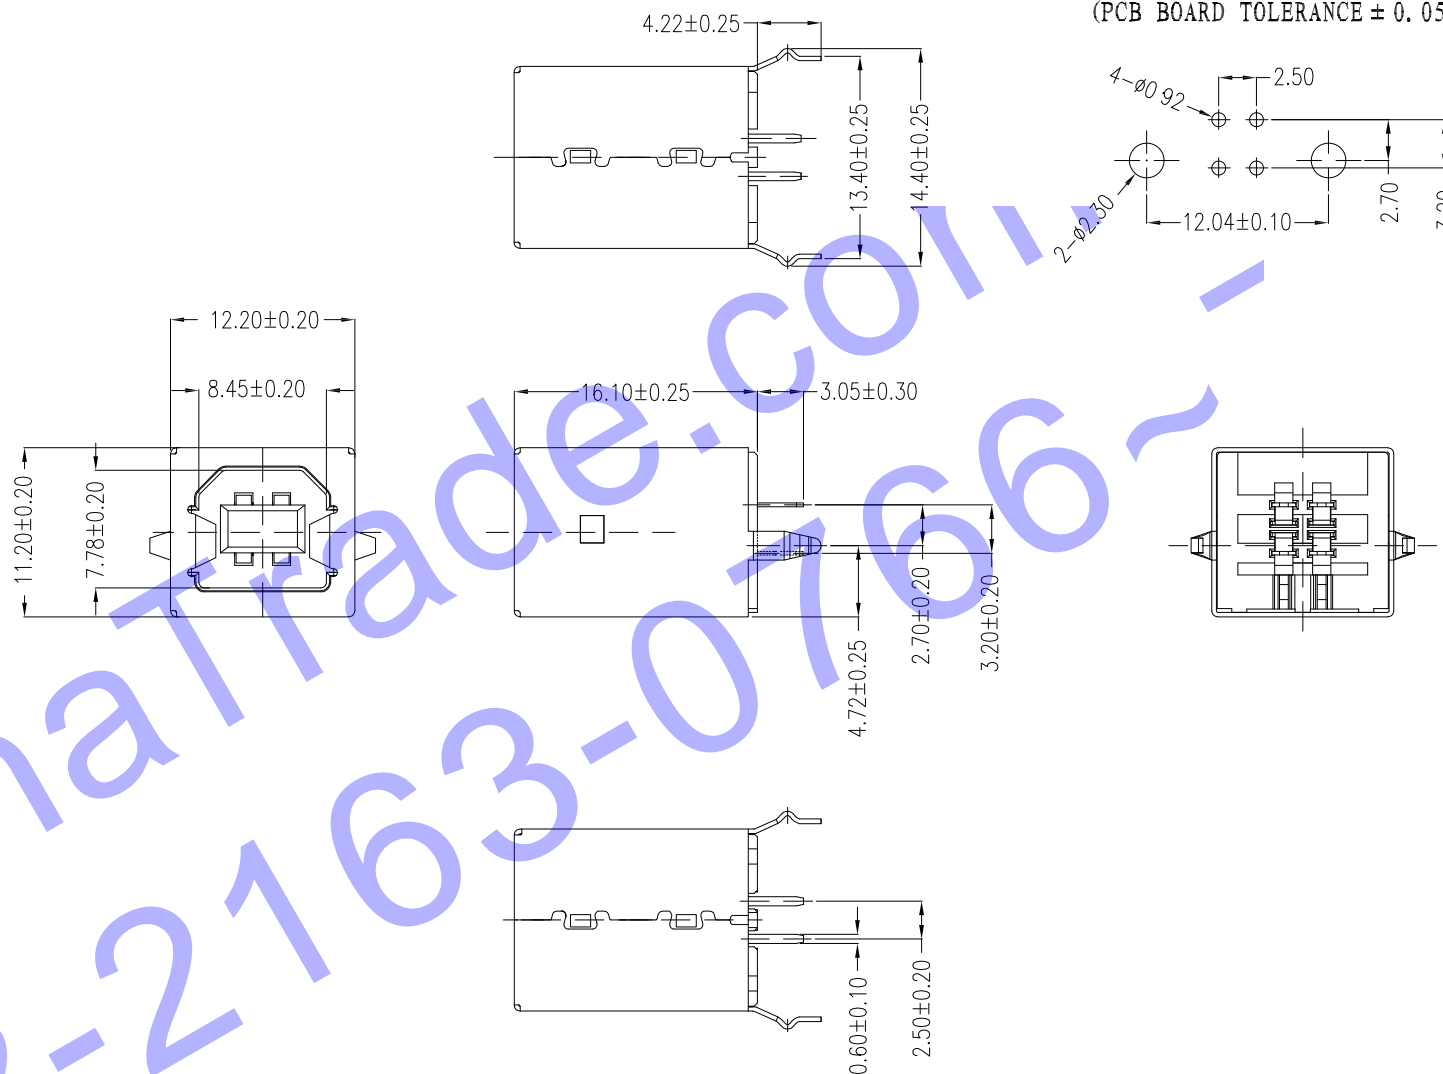

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	HDC 有限公司
				x.X ±0.40	Tsingsn	2012/09/26	UNIT	mm	USB-022	
A1	2012/09/26	Modify	13.80 ± 0.20 → 13.40 ± 0.25 14.70 ± 0.20 → 14.40 ± 0.25	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:	
A0	2011/09/01		NEW	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	USB B-TYPE 180° DIP	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE			PROJ.	Customer NO.		
				Angle ± 3'						
				DIM TOL						

GanaTrade.com

02-2163-0766