


RoHS COMPLIANT

NOTE:
 1.MATERIAL:
 1.1 INSULATOR:HIGH TEMPERATURE PLASTIC
 1.2 CONTACT:BRONZE
 1.3 SHELL:BRASS & K7 & SPCC
 2.ELECTRICAL CHARACTERISTICS;
 2.1 CONTACTRESISTANCE:30mΩ MAX
 2.2 CONTACT CURRENT RATING:1.5A
 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
 2.4 INSULATION RESISTANCE 100 MΩ MIN
 2.5 OPERATING TEMPERATURE:-40°C ~ 85°C
 3 MECHANICAL CHARACTERISTICS:
 3.1 MATING FORCE:3.57kgf MAX
 3.2 UNMATING FORCE:1.02kgf MIN
 3.3 DURABILITY:MANDATORY:5,000 CYCLES
 4.PLATING
 4.1 TERMINAL:
 50u" MIN NICKEL ALL OVER
 100u"MIN Tin ON SOLDER AREA
 (1~30)u"Au ON CONTACT AREA
 4.2 SHELL:100u"MIN.NICEL ALL OVER

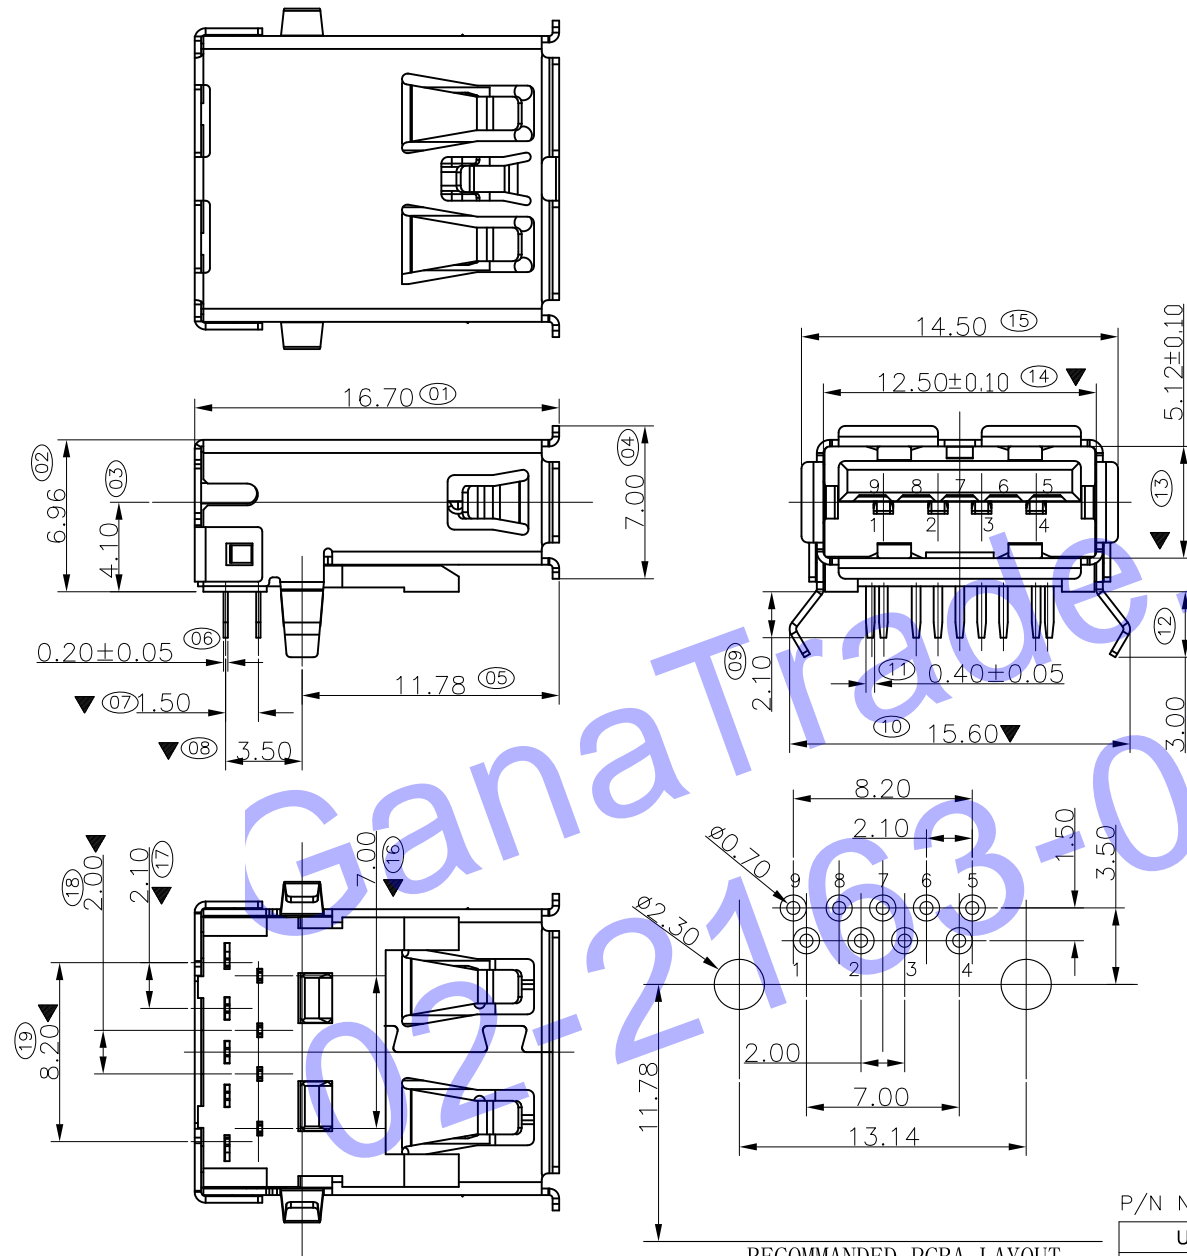

RECOMMENDED PCBA LAYOUT
(TOLERANCE+±0.05)

P/N NOTES:

USB-AF-J3126	端子镀金Au15u", 焊接区镀锡80~200u", 外壳镀镍50u", 塑胶LCP蓝色
USB-AF-J3127	端子镀金Au1u", 焊接区镀锡80~200u", 外壳镀镍50u", 塑胶LCP蓝色
Part NO.	SPECIFICATION

A	图面发行	09'-10-23	QUALITY SYMBOLS		UNIT mm	SCALE 3:1	TOLERANCES DIM. ±0.30 ANGLE: 3°	ITEM	DESC	Q'TY	MATERIAL	REMAKS	PART REMAKS
	REV	DESCRIPTION	DATE					APPROVED	CHECKED	DESIGN	DRAWN	PART NO.	DESCRIPTION

USB 3.0 AF板上90度DIP卷边弯脚成品图 【客户用图】