

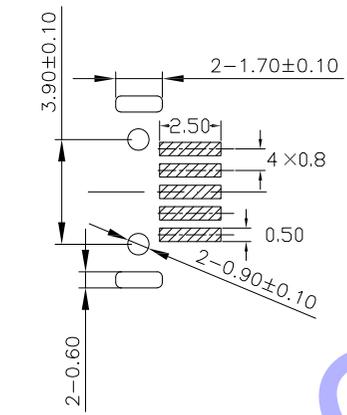
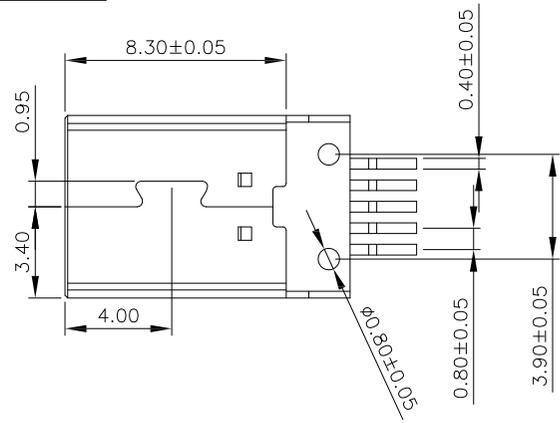
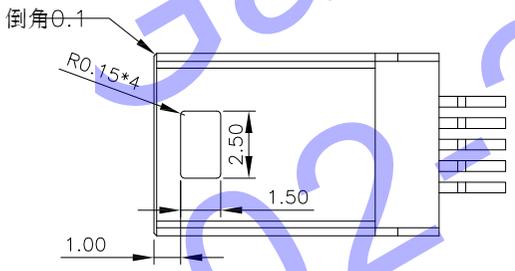


RoHS COMPLIANT




RECOMMENDED PCB LAYOUT

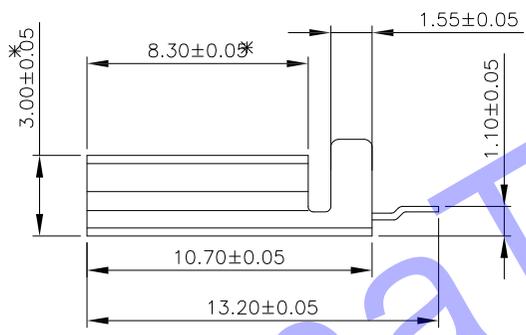

NOTES:
 Housing: Thermoplastics,UL94V-0
 Contact: Copper Alloy
 Shell: Copper Alloy/Steel
 Voltage Current Rating:1.5 AMP. 30V AC
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:30 MΩ Max.
 Dielectric Withstanding Voltage:500W AC
 Temperature Range:-35°C to +85°C
 Insulator color: Black/White
 Plastic material:PBT/LCP/Others
 Shell finish:Nickel plated/Tin-Lead plated
 Mechanical:
 Mating Force:3.5KG MAX
 Unmating Force:1.0 KG MIN.

QUALITY SYMBOLS
 ■ : CRITICAL
 ▽ : ZERO DEFECT
 ☒ : MAJOR S.P.C



UNIT: mm
 SCALE: 2.5 : 1
 TOLERANCES: DIM. ± 0.20, ANGLE: 3°

ITEM	DESC	MATERIAL		REMARKS		
APPROVED	CHECKED	DESIGN	DRAWN	PART NO.	SHT	1/1
				DESCRIPTION	MINI USB 5PIN	
				DRAWING NO.	REV	A

图面发行	'09-12-09
DESCRIPTION	DATE

【客户用图】