






RoHS Compliant

CUSTOMER DRAWING

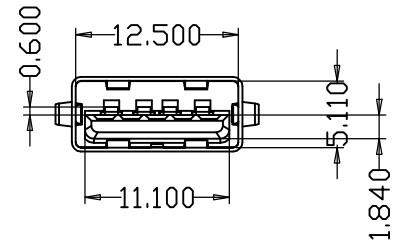

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:PBT & PA9T & LCP
- 1.2 CONTACT:COPPER ALLOY
- 1.3 SHELL:BRASS

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACT RESISTANCE:30mΩ MAXIMUM
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
- 2.5 OPERATING TEMPERATURE:-20° C ~ 60° C

3. PLATING

3.1 TERMINAL:

- 50u" MIN NICKEL ALL OVER
- 100u" MIN Tin ON SOLDER AREA
- (1~30)u" Au ON CONTACT AREA

3.2 SHELL:80u" MIN. NICEL ALL OVER

4. PART NO. :

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

ECN. NO	REV	DATE	DESCRIPTION	CHANGED	APPROVED
	A	10.08.16	RELEASE	JAMES	

TOLERANCES UNLESS OTHERWISE SPECIFIED	
X.	±0.30
X.X	±0.20
X.XX	±0.15
X.XXX	±0.05
ANGEL	±1°
MATERIAL:	
FINISH:	

HDC电子有限公司

DESIGN:	DATE:	TITLE: USB3.0 AF180度插板11.1 成品图(无卷边)			
CHECKED:	DATE:	PART NO:	SCALE:	UNIT:	SIZE:
APPROVED:	DATE:	DWG NO:	1:1	mm	A4
			1/1	SHEET:	REV:
				1/1	A