


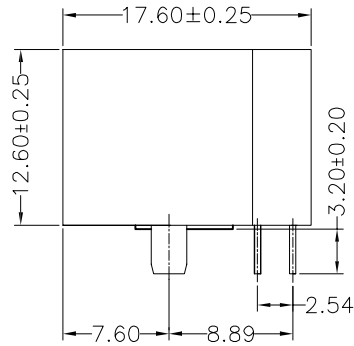


1 2 3 4 5 6 7 8

更改 REV	设计内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A	图面发行	2011/8/29	Oscar	Oscar



PC Board Layout

NOTES:

- MATERIAL:  
 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).  
 2.CONTACT MATERIAL :PHOSPHOR BRONZE Ø0.46mm (C5100).  
 3.PLATING :GOLD PLATING OVER NICKEL.
- ELECTRICAL:  
 1.VOLTAGE RATING :125 VAC RMS.  
 2.CURRENT RATING :1.5 AMP.  
 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.  
 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.  
 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.
- MECHANICAL:  
 1.DURRABILITY :750 CYCLES MIN.  
 2.PCB RETENTION PRE-SOLDER :1 LB MIN.
- ENVIRONMENTAL:  
 1.STORAGE : -40°C TO +85°C.  
 2. OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO  
 FCC PART 68,SUBPART F.

PART NUMBER:

5601-1110800XXX

- 56 SERIES:  
 (Latch down Jack)  
 Product Style:  
 01-标准 H=13.10mm  
 Shield Style:  
 1-W/O Shield 2-Half Shield 半壳  
 3-不带壳 4-上壳 5-左壳及壳 6-上、左壳及壳  
 7-上壳及壳、左壳 8-上壳、右壳、左壳
- PIN STYPES :  
 1-单脚 2-双脚
- PORTS:  
 1-1X1 PORT 2-1X2 PORTS  
 4-1X4 PORTS 8-1X8 PORTS
- Positions:  
 6-6P 8-8P 0-10P
- Contacts:  
 4-4C 6-6C 8-8C 0-10C
- PEG/TAB &BACK PEG (选装脚&后壳脚)  
 0-W/O PEG 1-脚长3.56 无后壳脚  
 2-脚长3.43 无后壳脚 3-脚长3.56 有后壳脚  
 4-脚长3.05
- Gold plating u"  
 1-Fu" 2-2u" 3-3u" 4-6u"  
 5-15" 6-30u" 7-50u"
- Logo&PcbType:  
 0-不装  
 1-W/HXAN LOGO  
 2-W/HXAN&ULLOGO
- Plastics Material&Color:  
 1-PBT+20%GF Black  
 2-PA46 Black
- LED Style:  
 0-W/O LED  
 1-L Led:Green R Led:Yellow  
 2-L Led:Yellow R Led:Green  
 3-L Led:Green&Orange R Led:Yellow  
 4-L Led:Green&Red R Led:Yellow  
 5-L Led:Green&Yellow R Led:Yellow  
 6-L Led:Red R Led:Green

DIMENSION IN mm [Inch]		H D C 有限公司		
TOLERANCE UNLESS OTHERWISE SPECIFIED		专业号 FILE NO.	图号 DWC NO. 5601-10P-005	
.X± 0.20	X.*± 1°	名称 TITLE 56 1X1 10P8C JACK (不包括壳)		
.XX± 0.15	.X.*± 0.5°			
.XXX± 0.075				
核准 APPROVE	审核 CHECK	制图 DRAW	角法 PROJ.	页次 SHEET 1 / 1
	JDL	Oscar	比例 SCALE 1:1	图框 SIZE A3
			更改 REV A	

1 2 3 4 5 6 7 8