


WIRE CONNECTION

P1	COLOR	P2
1	RED(红)	1
2	WHITE(白)	2
3	GREEN(绿)	3
4	BLACK(黑)	4

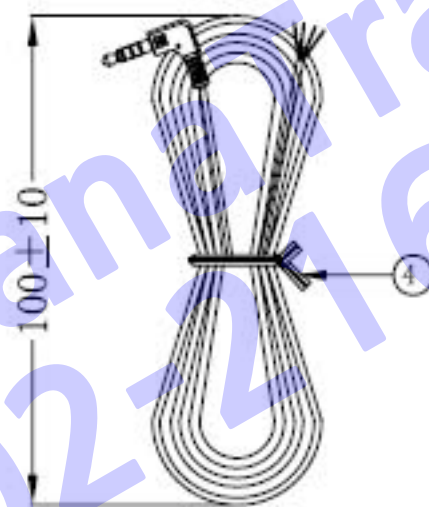

包装方式：如图扎线，不用装袋。

ITEM LIST

NO.	ITEM	DESCRIPTION	AMOUNT
①	CABLE	UL2464 26#(7/0.16BC)*4C (RED, WHITE, GREEN, BLACK) OD:3.0±0.1 BLACK 100P软半雾 L=1500MM	1PCS
②	CONN	STEREO3.5/M 4POLE POM BLACK SHEEL GOLD	2PCS
③	TERMINAL	YH1.25 TERMINAL-F	4PCS
④	HOUSING	YH1.25 4P HOUSING-M (然湖1.25母胶壳)	1PCS
⑤	PVC	45P PVC COLOR:BLACK	6g
⑥	MINI TIE	L=80MM BLACK OVAL TIE	6g

TEST REQUEST:

- 1.OPEN SHORT 100%
- 2.CT≤2Ω IS≥5MΩ
- 3.HV:DC 300V TIME: 0.1SEC

1X	ORIGINAL		
REV	DESCRIPTION	APVD	ECD NO.

DRAWN BY	<i>Famous</i>	CUSTOMER	HDC 有限公司
CHECKED			
APPROVED			
-TOLERANCES-		TITLE	STEREO3.5/M TO OPEN
XX±0.5 XXX±0.10		SHEET: 1/1	DRAWING NO: JS003320
ANGLES ±5			UNIT: mm
THIRD ANGLE PROJECTION			REV. 1X

1
2
3
4
5
6
7
8
9
10
11
12
13
14