
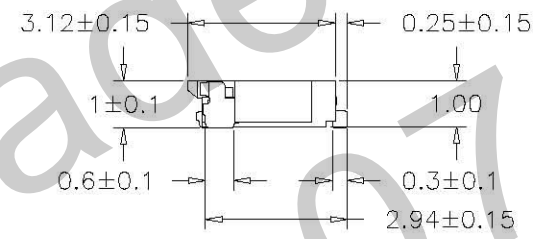
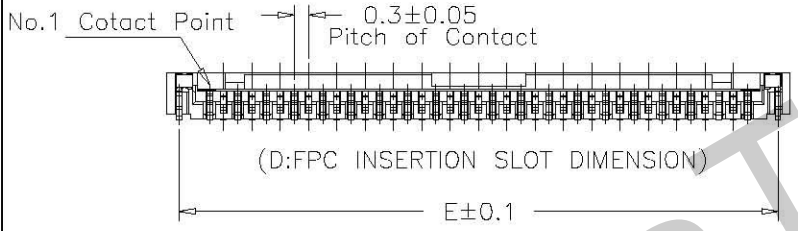
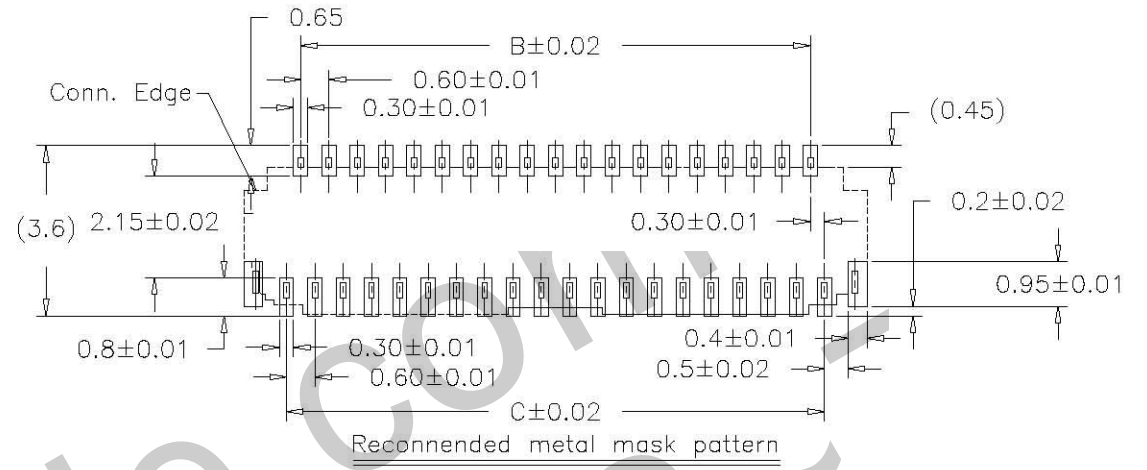


REV.	ECO NO.	DATE	SIGN	DESCRIPTION

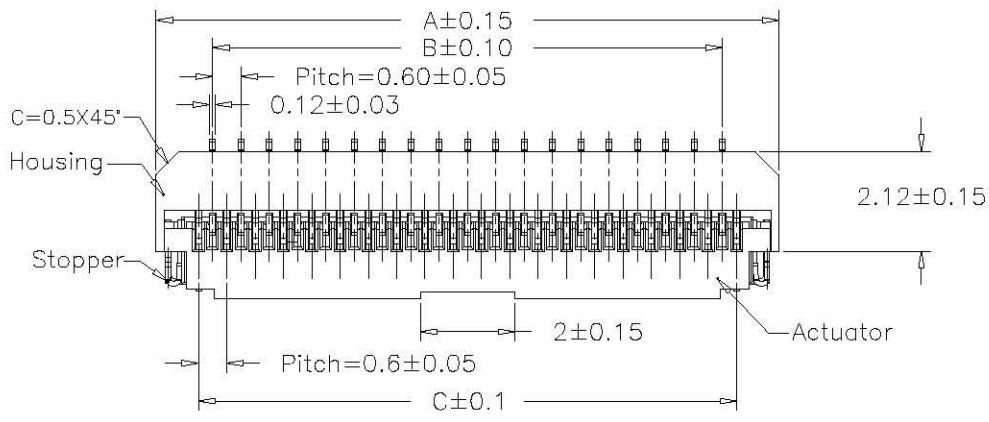

NOTE:
 1.MATERIAL:
 HOUSING: LCP E6808UHF COLOR:BLACK.(UL94V-0)
 SLIDER: LCP E6808UHF COLOR:WHITE(UL94V-0)
 CONTACTS: PHOSPHOR BRONZE C5210-SH T=0.12±0.01mm.
 SOLDER PAD: PHOSPHOR BRONZE C5210-SH T=0.12±0.01mm.
 2.PLATING:
 CONTACT: SEE ORDERING INFORMATION
 STOPPER: TIN OVER NICKEL(LEAD FREE)
 4.RATING:
 OPERATING VOLTAGE: 30V Max (AC/DC)
 CURRENT RATING: 0.2 AMPS Max (AC/DC)
 OPERATING TEMPERATURE: -25~+85°C

Number Of Contact	A	B	C	D	E
13	5.4	3.0	3.6	4.23	4.9
21	7.8	5.4	6.0	6.63	7.3
23	8.4	6.0	6.6	7.23	7.9
25	9.0	6.6	7.2	7.83	8.5
27	9.6	7.2	7.8	8.43	9.1
33	11.4	9.0	9.6	10.23	10.9
35	12.0	9.6	10.2	10.83	11.5
39	13.2	10.8	11.4	12.03	12.7
41	13.8	11.4	12.0	12.63	13.3
45	15.0	12.6	13.2	13.83	14.5
51	16.8	14.4	15.0	15.63	16.3
57	18.6	16.2	16.8	17.43	18.1
71	22.8	20.4	21.0	21.63	22.3

TOLERANCE UNLESS SPECIFIED		SHEET 1/1	DR. BY	MATERIAL SEE NOTE 1
LINEAR	ANGLE	SCALE 1/1	CHK. BY	FINISH SEE NOTE 2
.X±0.10	.X°	UNIT mm	APP. BY	PART NO.SEE NOTE 3
.XX±0.05	.X°			
.XXX	.XX°			

ANA TRADE 02-2163-0766

GANNA ELECTRONIC

TITLE 0.3E-NPBX
DWG NO.