

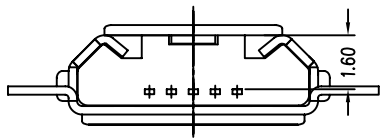
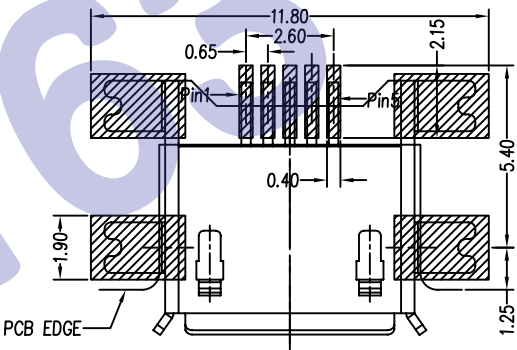
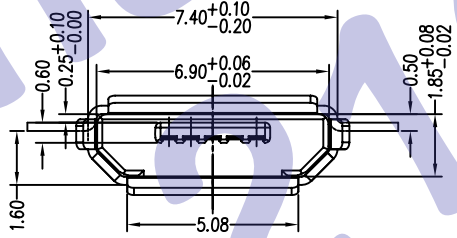
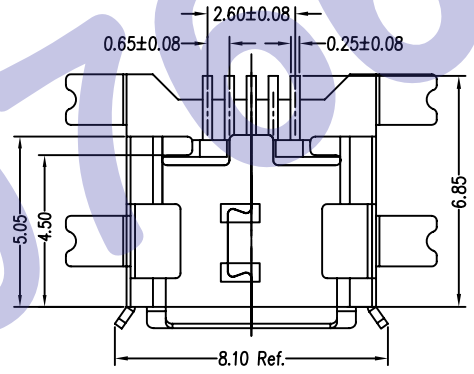



5 4 3 2 1

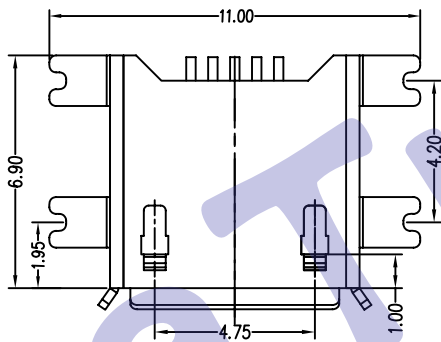

MU137- □ □ □ □

颜色 (主体)	材质 (主体)	外壳镀层	端子镀层 (接合处)
1: 黑色	1: PBT	1: 全金	1: 1U"
2: 白色	2: LCP	2: 全镍	2: 3U"
3: 贝吉色	3: NL9T	3: 全锡	3: 5U"
4: 灰色	4: NL6T	4: 前金后锡	4: 10U"
5: 蓝色	5: ABS	5: 前金后镍	5: 15U"
6: 绿色	6: NL6T	6: 前镍后锡	6: 30U"
7: 红色	7: PPS	0: 其它	0: 其它
8: 其它	8: PVC		
	9: PE		
	0: 其它		



- Notes:
- Materials:
    - 1.1 Housing: High temperature thermoplastic with g.f.,UL94 v-0.
    - 1.2 Contact: copper alloy,t=0.20mm.
    - 1.3 Shell: copper alloy,t=0.25mm.
  - Specifications:
    - 2.1 Current rating: 1 A Max.
    - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
    - 2.3 Contact resistance: 50 mW Max.
    - 2.4 Insulation resistance: 100 MW Min.
    - 2.5 Total mating force: 3.57 Kgf Max.
    - 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
    - 2.7 Temperature range: -30°C~+80°C

A

A

设计 DRAW BY	杨帆	审核 DISCUSS BY		HDC有限公司	图名 DRAWING NO	MICRO USB 5PF B TYPE沉板 1.6 SMT	图号 SHEET NO	MU137	日期 DATE	2012.06.
校对 DISCUSS BY		比例 SCALE	2:1		料号 VERSION		数量 QUAN	备注 REMARK	版次 REMARK	张号 SHEET

6 5 4 3 2 1